

Pet Auto Feeder

Product Manual


Catalogue


Please read this manual carefully before use to ensure safe use of the Intelligent automatic feeder.


Product Introduction.....	2
operation guide.....	3-8
Frist Time Use	3
Function Description.....	3
Bind Smart Life App.....	3-6
Video version feeder interface introduction.....	7
Wi-Fi version feeder interface introduction.....	8
Cleaning/maintenance	9
Precautions	10
common problem	11


Feeder (subject to the actual product)

List of accessories (subject to the actual product)


 adapterX1

 cableX1

 manualX1

 Desiccant x1

Product Introduction

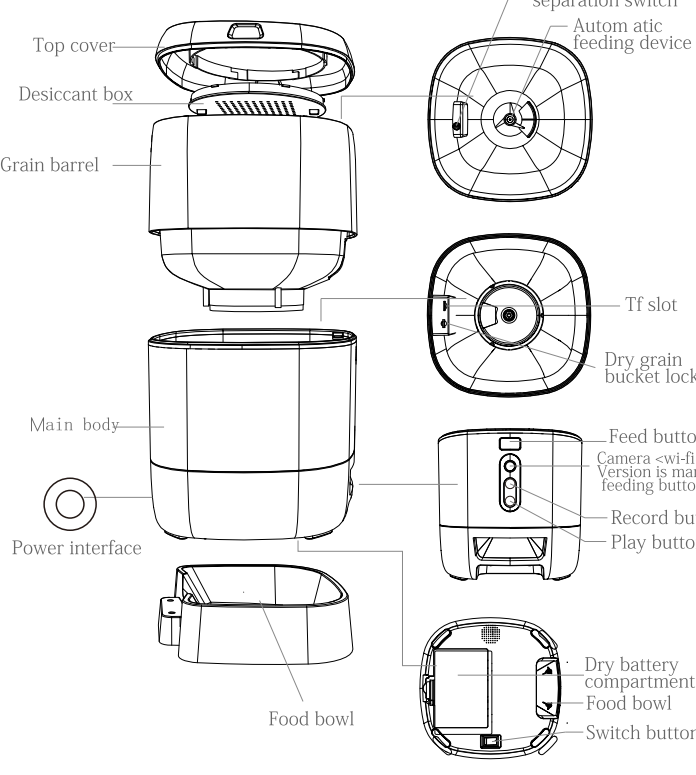

Operation Guide

1. The first use


(1)Open the top cover of the feeder and remove the power cord adapter from the bucket.
(2)Plug the power cord into the power connector on the rear of the main unit and connect the adapter to power.
(3)Place the main unit in a horizontal position and the food bowl is installed at the corresponding position of the main unit.
(4)Add pet dry food to the feeder bucket.
(5)The desiccant is placed in the desiccant box by default. Please replace it regularly for long-term use (do not use cleaning).
(6) The battery compartment can be installed with 3sections of No. 1 battery for manual feeding when there is no electricity (optional).
(7)Bind the feeder to the Smart Life app to set up the feeding and planning of the pet.

2. The function description

Feed button: Short press to eat one, long press for 5 seconds to restore the factory settings.
Record button: Press and hold the "Record button" to record the sound to remind the pet to eat before feeding.
Play button: Plays the recorded sound.
Rocker switch: Feeder switch.
Dry battery compartment: Three 1st batteries can be installed for power supply.


3. Bind Smart Life APP

3.1 APP download and installation
Scan the QR code below to download the Smart Life app and complete the installation.




3.2. Regis-tered APP

①Open the Smart Life APP.
②Click "Create a new account".
③ Select the time zone to enter the account and click to get the verification code.
④Enter the received verification code for verification.
⑤Set up login password and login successfully

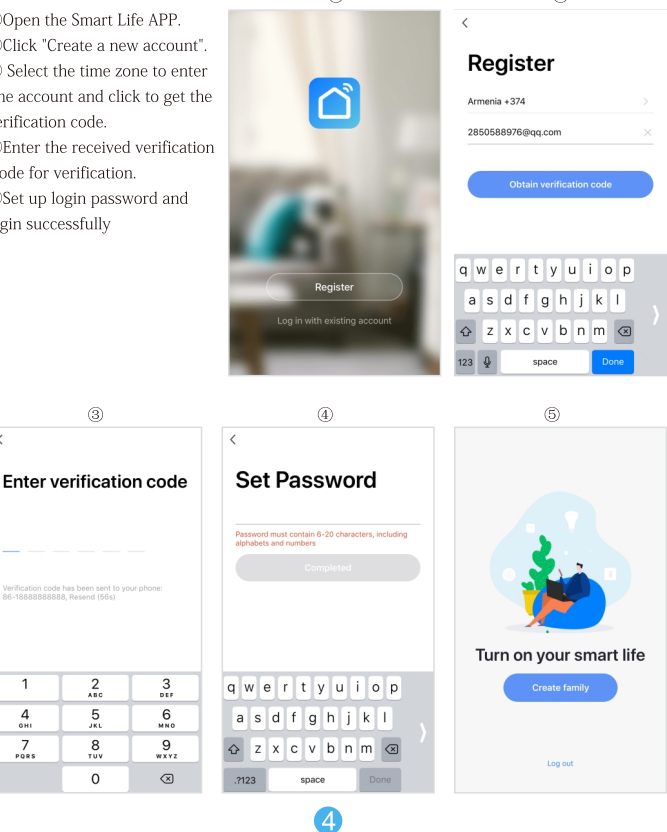


3.3. Quick Configuration

①Open the APP, click "add device".
②Click "Others"--"pet feeder"
③Click "Confirm"indicator rapidly blink"
④Enter wifi password and confirm
⑤Conncting
⑥Device added successfully

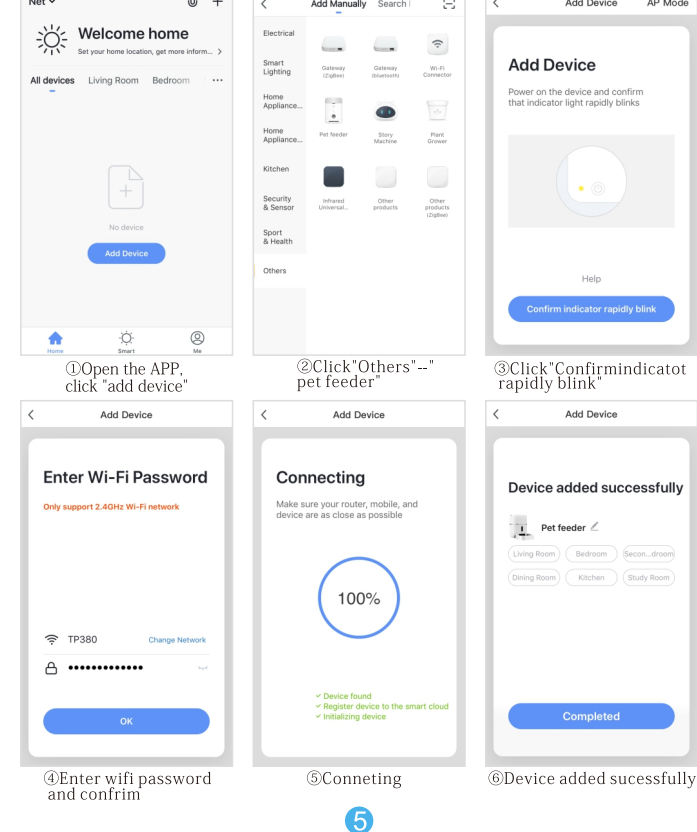

3.4. Video Version Pet Feeder Configuration

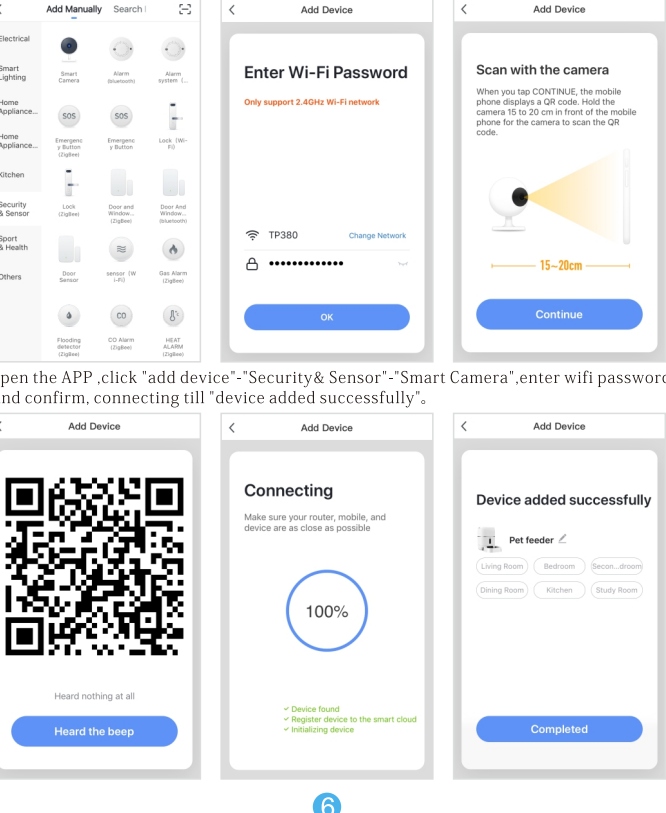

Open the APP ,click "add device". "Security & Sensor". "Smart Camera", enter wifi password and confirm, connecting till "device added successfully".

4、Video Feeder APP Interface Introduction


Monitoring Screen Introduction

①Setting: set other functions
②Signal: Signal quality
③Horn: Real-time monitoring
④SD/HD: switch image quality
⑤Full screen
⑥Screenhot: take a picture from the video
⑦Talk: 2 way voice intercom
⑧Record: take record and save into the mobile phone
⑨Play: SD card video playback
⑩Alarm: motion detection alarm on/off
⑪Feeding: click to feed
⑫Timed feeding: delivery food at regular intervals
⑬Cloud playback: Cloud storage video playback

Setting

①Device name: edit pet feeder name
②Share device: share the device with others
③Device information: Query information
④Basic function settings: Flip screen & Speech method
⑤Motion detection: motion detection alarm switch
⑥Memory card settings: Video mode and status of SD card
⑦Feedback: Write feedback and send
⑧Firmware information: firmware version & on-line upgrade
⑨Remove device: remove device and unbind

5. WiFi Feeder APP Interface Introduction

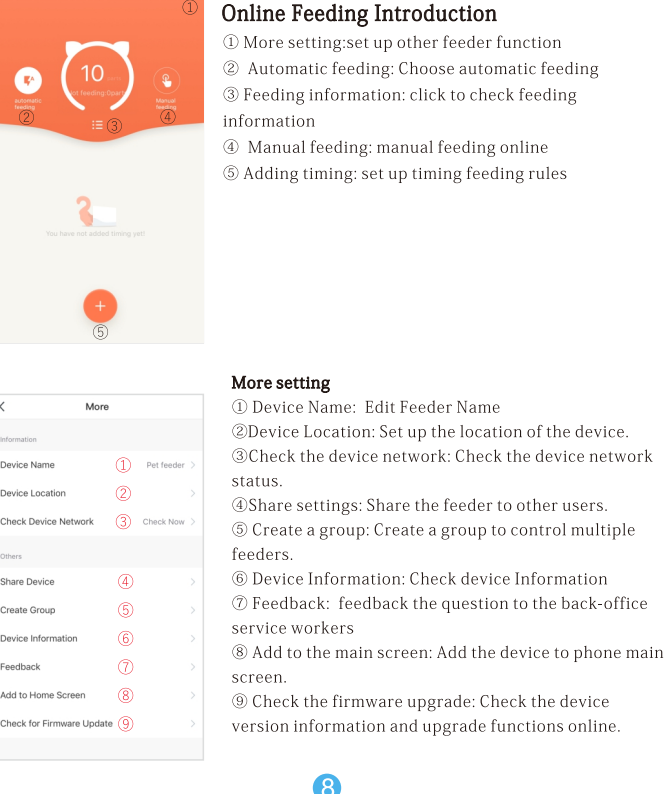

Online Feeding Introduction


① More settings: set up other feeder function
② Automatic feeding: Choose automatic feeding
③ Feeding information: click to check feeding information
④ Manual feeding: manual feeding online
⑤ Adding timing: set up timing feeding rules

More setting

① Device Name: Edit Feeder Name
②Device Location: Set up the location of the device.
③Check the device network: Check the device network status.
④Share settings: Share the feeder to other users.
⑤ Create a group: Create a group to control multiple feeders.
⑥ Device Information: Check device Information
⑦ Feedback: feedback the question to the back-office service workers
⑧ Add to the main screen: Add the device to phone main screen.
⑨ Check the firmware upgrade: Check the device version information and upgrade functions online.

Cleaning/maintenance

After the feeder has been used for a period of time, the bowl and the bucket should be cleaned with a cleaning agent to avoid the occurrence of bacteria that affect the health of the pet due to the long time left by the food residue.

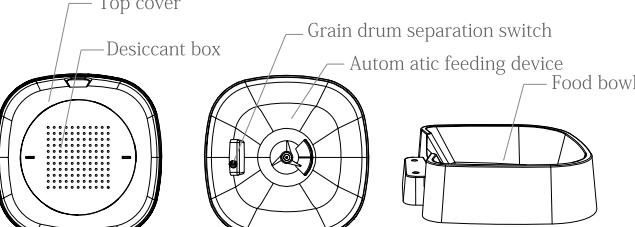

1. The upper showed machine parts can be removed from the main feeder and cleaned with detergent and water.
2. The drying box in the upper cover is rotated counterclockwise to remove it.
3. The grain drum is dismantled by rotating the "grain barrel separation switch".
4. The bowl is taken out by pulling down.
5. After cleaning, it must be dried or air-dried before being assembled into a whole main feeder for use.

▲ This feeder is suitable for dry foods smaller than 12 m.m. Freeze-dried food is not available. Please keep the environment dry.

Attentions

1. Please place the device correctly: prevent the pet from tipping over the device. This device is only suitable for small and medium pets under 20kg.
2. Please replace the desiccant in the storage lid regularly. No desiccant is needed.
3. Please keep the food bucket dry and sealed, and check regularly to ensure food residue
4. Do not drop all substances other than pet dry food into the grain bin. Otherwise, the device may be used abnormally or even cause pet safety problems.
5. To prevent the pet from falling over the product, it is recommended to place the corner or against the wall.
6. The product anti-battering line should be installed as concealed as possible to prevent the equipment from being damaged by the pet biting the wire.
7. If children are using this device, be sure to use it under adult guidance.
8. After installing the spare dry battery, you can manually operate the device to provide normal power supply during power failure.
9. Regularly clean the food bucket and food bowl.
10. This device is not recommended for young pets within three months.

FAQ

Q. The feeder is not connected, what is the problem, what to do.
A.
1. Check if the machine is normal: Check the status of the device indicator. After the power is turned on, the blue indicator light flashes. When the network is connected, it will be on. There will be a drop time before the network is configured.
2. Check if the Wi-Fi username and password are normal: Wi-Fi username and password cannot have special characters. It is recommended to use English letters + number signs
3. Uninstall the software and reinstall the software: Please authorize the APP to obtain the location information and access the network permissions during the installation process. Follow the above steps, and enter the correct wifi password. If you still have difficulties, please contact customer service.
Q. When connecting the feeder, sometimes it can be connected normally, sometimes not, how to deal with it.
1. Check if the machine's food outlet is blocked. At this time, the blue indicator is all ways on. Q. Why does the feeding time differ by tens of seconds from the current time?
A. The parameters set on the APP will have an error of about 30 seconds depending on the timing of the network environment.
Q. How to quickly reconnect after the machine is disconnected.
A 1. Exit the APP and re-enter, wait for the data update
2. Switches from the feeding interface to the video interface and waits for the video to refresh.
Q. About SD card support capacity.
A. Support 8-64G
Q. Feeder requirements for network type
A. The feeder must use a wifi signal that satisfies the wifi 802.11 bgn protocol.

单页尺寸：100*127mm