




. Switch button and wiring instructions







personal injury and / or damage to the switch.
This device is intended for installation in accordance with the

national electric code and local regulations in the United States, or Canadian electrical code and local regulations in Canada. If you are unsure or uncomfortable about performing this installation, consult a qualified electrician. Multi-switch wiring 3 gang installation, please refer to add-on manual single

switch wiring before you start: you may wish to change the

paddle color to match your wall plate or decore.

Please proceed to section 5.

Installation Instruction

1. Shut off the circuit power at circuit breaker or fuse box (IMPORTANT!!! Make sure the power is OFF to switch 3. Remove the switch mounting screws 4. Carefully remove the switch from the switch box. 5. There are up to five screw terminals on the switch.

1.Press/release to turn the switch on/off 2. Reset the light switch: Press button for 20 seconds till wifi signal flashes which indicates a successful reset B. Ground wire (green/bare) C. Neutral wire (white) Simplified steps to install the App on your

D. Live wire (black) E. Load wire (black)

box before continuing.)


hese are marked

A. Switch button





smart device and pair with Amazon




 Make sure quick mode configuration is initiated the indicator light blinks blue rapidly (twice per second). If it blinks blue slowly (once every 3 seconds), press and hold the power button on vour Smart Switch for 20 seconds until the indicator light blinks rapidly.

2. Tap the icon "+" on the top right corner of choose your device type and enter "Add Device"



2. Tap the icon "+" at the top right corner of 'Start your smart life" tab and then click "AP Mode" at the top right corner of "Add Device" tab to add device.

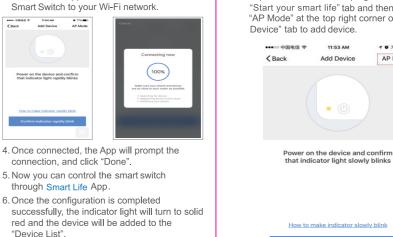

AP Mode

4. Once connected, the App will prompt the connection, and click "Done". 5. Now you can control your Smart Switch

Power on the device and confirm that indicator light slowly blinks

through Smart Life APP. 6. Once the configuration is completed successfully, the indicator light will turn to solid red and the device will be added

Please note: you can add the Smart Switch to Echo/Google Home following this instructions below, or one on the App (Open Smart Life App, go to "Profile" "Integration ,tap , Home"and install). **10** "Integration".tap"Amazon Echo"or"Google

Check whether the router's connected device

some devices' Wi-Fi function and configure

reach the amount limit. Please try to turn off

■ Check if router's wireless MAC filtering function

is enabled. Remove the device from filter list and make sure the router is not prohibiting Mini

3. Follow the in-app instructions to connect the

1

Smart Switch to your Wi-Fi network.

How to connect your Smart Switch to Amazon Alexa 1. Launch Smart Life App, sign in your account and make sure your Smart Switch is in your device list.


2. Name each device, such as living room light or bedroom light, so that Alexa can easily recognize them. 3. Minimize Smart Life App, then launch the

make sure you have at least one Alexa

Alexa App and sign in your Alexa account and

voice-controlled device installed like Echo,

Echo dot, etc. 4. In the upper left corner of Home page. click button to show App menu. Then clicks Skills in the menu.



5. Type in "Smart Life" in the search and click the search button.



6. Enable Smart Life, then sign in your Smart Life account to complete the account linking





7. After successful account linking, ask Alexa to discover devices. After a 20-second device discovery, Alexa will show all the discovered



8. Back to Menu by clicking button, and then click Smart Home button.




9. In Smart Home page, you can group your devices for different categories. Your Smart Life APP has been skilled with Alexa. Now you can control your Smart Switch via Alexa.




How to connect you Smart Switch to Google Home 1. Launch the Google Home App and make sure Google Home speaker is installed. If not,please follow the Google Home Speaker installation


2. Once Google Home is installed, in the upper left corner of App Home page, click button to show App menu. Then clicks "Home Control" in the menu.



3. On "Add devices" page, scroll down to find "Smart Life" and then click it. Sign in Smart Life App with your Smart Life App account and password choose Smart Life App in the dropdown menu to complete the account



4. After successful account linking, in Google from your Smart Life App account. You can assign rooms for each device.



Home App you can see all the smart devices 16

5. Now you can use Google Home to control your smart devices, you can say like: Ok Google, turn on/off wall light

Ok Google, set bedroom light to red ← Assign rooms DONE : ← ✓ You're all set! Try saying these things to the Goo Assistant to control your smart he devices.



After complete the above operations, you can control the irstly, you need to say "Ok Google, talk to Smart Life" to wake up the Smart Life.
Then you can control devices by instructions like these:

•1l) Turn on Smart Switch Turn off Smart Switch

Attention: after Smart Life has been waken up. you can say "Cancel" or "Stop" to exit Smart Life or say "nothing" when you hear "What can I do for you". Then says again "Ok Google, tale to Smart Life" to start voice control. 17

6. IFTTT - Setup and Usage

Get Started: How to connect Smart product to IFTTT?

Smart Life Connect

Successfully connect your IFTTT account to your Smart Life ID. You are ready to enjoy the IFTTT service of products now.

Instructions: 2 methods to use IFTTT with Smart products.

Click "My Applets" at the top and then click "New Applet" at theright top corner of the webpage to create a new Applet. Step 1. Create a Trigger. Note: You can also use IFTTT app and follow similar steps to connect your device to the IFTTT. In this FAO we take the Tap "this" to choose a Trigger, You can search for "Weather Inderground" to choose a Trigger website setting methed for example.

Step 2. "Search" for "Smart Life", and then click "Smart Life" service. Step 3.

Click "Connect", then login your Smart Life ID and then tap "Link Now". Step 2. Create an Action.

Tap "this" to choose a Action, You can search for "smart life" to choose a Smart Life Action.

3. Follow the in-app instructions to connect the

Power on the device and confirm that indicator light rapidly blinks

connection, and click "Done".

through Smart Life App.

"Device List".

AP Mode Configuration

1. Make sure AP mode configuration is initiated:

(once every 3 seconds). If it blinks blue rapidly

(twice per second), press and hold the power

button on you Smart Switch for 20 seconds

Method 1: On Smart Life swrvice page. choose an existing Applet you need, turn on it and then finish the configuration.

Method 2: Create a new Applet on your own

We select "Sunset"

as the Trigger.

the indicator light blinks green slowly

until the indicator light blinks slowly.

We select "Turn on" of Light Switch as the Action Step 3.

New Applet "If sunset, then turn on Light Switch" is created as a resuit.

Note: The Smart Life service can only works when create an action. You can't use the "Smart Life" as a Trigger. 19

are turned on.

process has failed?

router is working properly:

or set both as auto.

range.

Troubleshooting and FAQ 1. What devices can I control with the Smart Switch?

You can control lights, in accordance with the Smart Switch specifications.

2. What should I do when I cannot turn Smart Switch on or off?

Check whether your mobile device is connected to 2.4GHz Wi-Fi network.

If the router is dual-band router, select 2.4G

Configure the encryption method as WPA2-PSK

■ Check for Wi-Fi interference or relocate the

Smart Switch to another location within the signal

network and then add Smart Switch.

and authorization type as AES,

■ Wireless mode cannot be 11n only.

9

Smart Switch from connection. • Make sure the password of your Wi-Fi network Make sure your mobile devices and the Smart Switch entered in App is correct when adding • Make sure the devices connected to the Smart Switch Smart Switch.

• Make sure the Smart Switch is ready for

Smart Switch again.

App-Config: the indicator light is quickly blinking blue (twice per second) for Quick mode configuration, 3. What should I do when device configuration slow blinking blue (once every 3 seconds) for AP Check whether the Smart Switch is powered on

Repeat the App-Config process.Factory reset the Smart Switch and try to add

Electro-Optical Charasteristics(Temperature=25°C)

Wavelength λ_P